




PP SERIES PUSH-PULL TYPE QUICK COUPLINGS

PP Series Hydraulic Push-Pull Type Quick Couplings have breakaway function. Female parts can be installed in a bulkhead with retaining rings and double acting sleeve allows one handed Push-to-connect and disconnect operation.

Breakaway future prevents hose breaking and possible loss of oil in case of accidental disconnection. Male nipples of FS Series Hydraulic Quick Couplings are hardened by heat treatment.

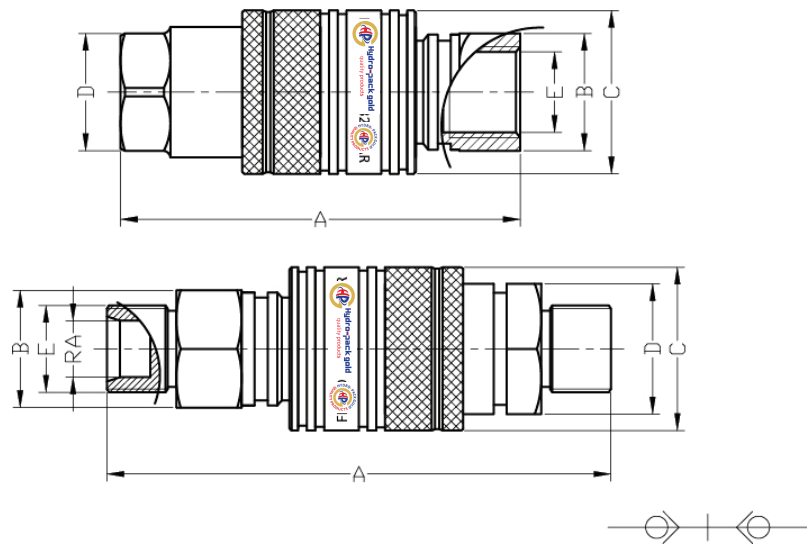

Technical Specifications

(Code)	(Thread Size) E	(Working Pressure) Bar	(Dimensions) - mm				
			A	B	C	D	RA
PPM1815SN	M18 x 1,5	350	116	27	38	30	12
PPM2015SN	M20 x 1,5	350	116	27	38	30	12
PP30M2015SN	M20 x 1,5	350	116	27	38	30	30° Havşalı
PPM2215SN	M22 x 1,5	350	113	27	38	27	15
PPM2415SN	M24 x 1,5	350	116	27	38	30	16
PPG12SN	1/2" BSP	350	92	27	38	27	-

